

➤ **COMPACT MIDI**
1.4

TECHNICAL FEATURES



POWERED BY

➤ COMPACT MIDI 1.4

HIGH PERFORMANCE AND LITTLE SPACE, FOR THE PRODUCTION OF SMALL TO MEDIUM SIZE BOXES IN DIFFERENT FORMATS.



➤ MANAGEMENT SOFTWARE BOXLINK™



WELCOME SCREEN



REPORTS SCREEN




SCREEN CARDBOARD TRAYS



PRODUCTION SCREEN

► EXAMPLE OF DIMENSIONS IN FULL CONFIGURATION

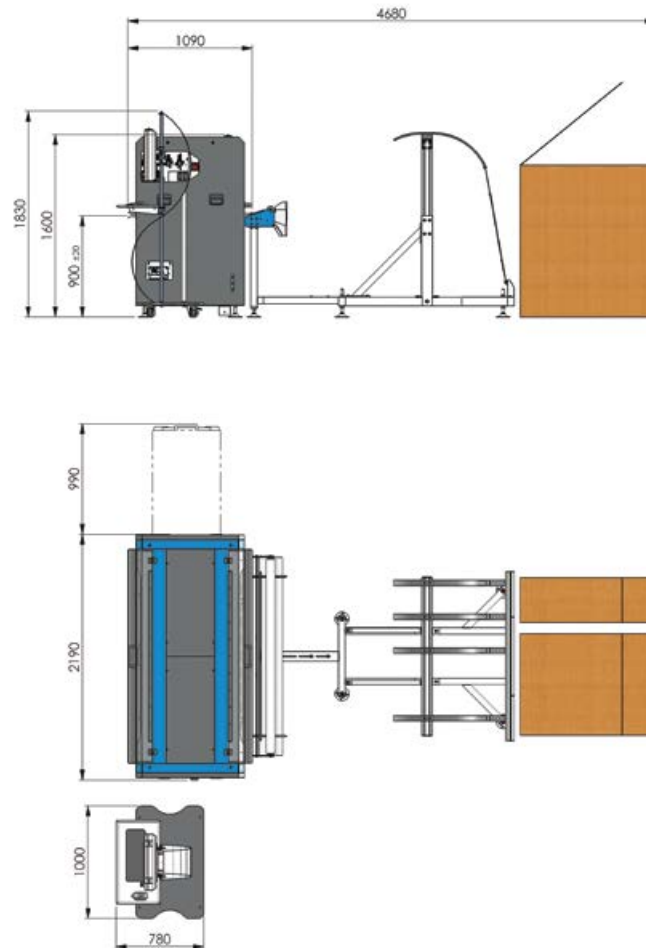


► OPERATIONAL BOX PRODUCTION UNIT

Compack MIDI is equipped with a transversal unit and up to 12 longitudinal units, that position automatically for cutting and creasing during the production process.

► OPTIONAL SUPPLEMENTARY COMPONENTS

A wide range of add-on components such as printing systems for labelling and box identification, high definition printing or devices for measuring, glueing and strapping are available for **Compack MIDI**.

We will gladly provide you with more detailed information on request.

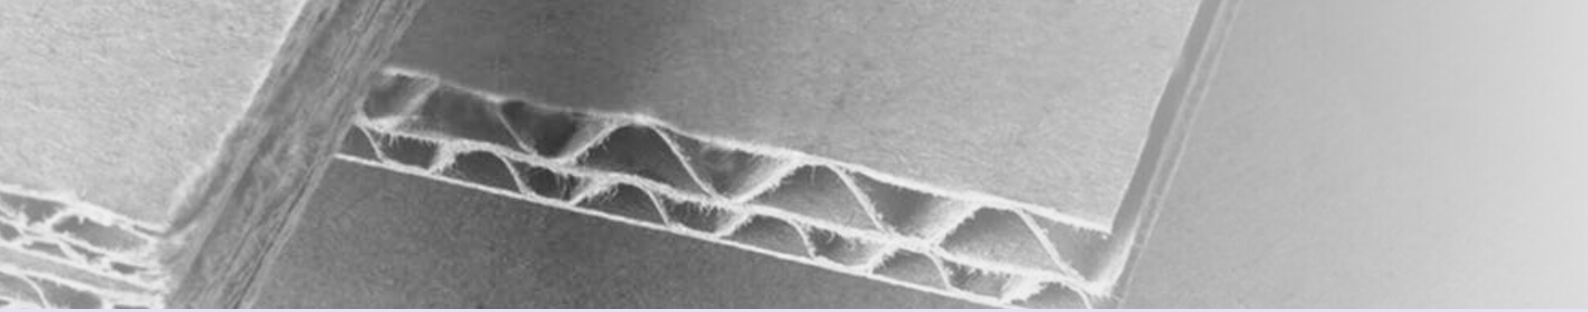

➤ CARDBOARD FEED

AVAILABLE CARDBOARD FEED OPTIONS:

3 different cardboard feed options are available for the machine:

- fanfold form (1)
- single sheets (2)
- single sheets and fanfold form



SIDE BY SIDE

By using the Side by Side feeding system available for fanfold cardboard sheets 2 different cardboard sheets can be positioned side by side. To produce the required box the system automatically chooses the most suitable sheet.



➤ INTEGRATED SYSTEM BOX ON DEMAND



- 1 **SCANPACK:** measuring station that detects the dimensions of a product or a composition of products. It sends the data to the packaging machine, which then automatically produces the correctly- sized packaging.
- 2 **COMPACT MIDI 1.4:** packaging machine with integrated PRINT ON DEMAND system. This high resolution ink jet print system allows to simultaneously print and produce the box.
- 3 **E-GLUER:** automated glueing station for slotted boxes.
- 4 **TRANSFER STATION:** for the packed goods.

FIELDS OF APPLICATION:

- AUTOMOTIVE
- SPARE PARTS
- E-COMMERCE
- LOGISTICS

All Panotec solutions can be connected to the company network and let you receive the production data from the customer's management system.



PANOTEC s.r.l.

Via G. Polese, 2 - 31010 Cimadolmo TV
T. +39 0422 432715 F. +39 0422 1821423
www.panotec.it ■ www.boxondemand.it
info@panotec.it ■ VAT IT02462930260





For more information, please contact Boxon

info@boxon.com

► TECHNICAL FEATURES

CARDBOARD WIDTH	Min. 400 mm ÷ Max. 1.400 mm
CARDBOARD THICKNESS	From 2 mm to 7 mm
MIN. LENGTH OF OPEN BOX	420 mm
CARDBOARD FEED SPEED	40 m/min
FEEDING OPTIONS	Fanfold cardboard (single or 2 side by side) and/or single sheets
CONNECTION	ELECTRICAL: 400-480 V 50-60Hz
	POWER SUPPLY: 3 kVA
	COMPRESSED AIR: min. 6-7 bar (max. consumption 100NI/min)